

Data sheet

OpDAT REGpro front cover 12xST SM+MM

Page 1/5

P/N

15024A0112-E

EAN 4250184130369


2024/10/15

Version: AB

Illustrations



Dimensional drawing

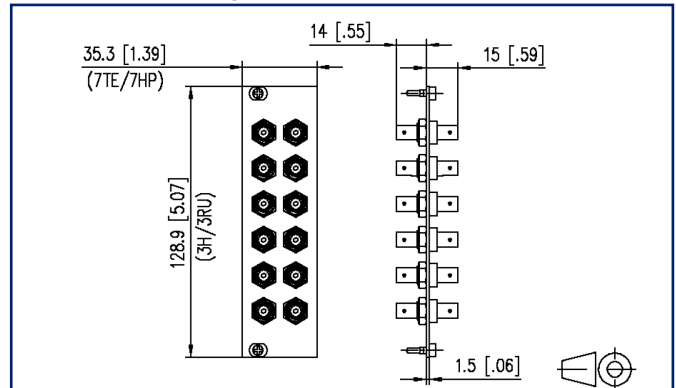

See enlarged drawings at the end of document

Product specification

- front plate 3RU/7HP with 12 ST adapters
- slotted ceramics sleeve for single mode and multi mode applications
- suitable for mounting in OpDAT REGpro and OpDAT REG S
- gray, powder-coated steel sheet



P | Cabling

Data sheet

Page 2/5

OpDAT REGpro front cover 12xST SM+MM

P/N

15024A0112-E

EAN 4250184130369

2024/10/15

Version: AB

Technical Data

General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	front plate
Mounting style	3RU/7HP
Transmission technology	Fiber optic
Color	metallike
Dimensions	
Dimension (L x W x H)	30.5 mm x 128.9 mm x 35.3 mm
Dimension (L x W x H)	1.201 in. x 5.075 in. x 1.39 in.
Height unit	3RU
Horizontal pitch	7HP
Mode type of the fiber	Singlemode + Multimode

Connections/interfaces

Connector technology interface 1	ST-S Couplers
Connector technology interface 2	ST-S Couplers
Number of ports interface 1	12
Number of ports interface 2	12
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12

Mechanical data

Cut-out	ST
Connector type	simplex
Life - Number of mating cycles	min. 1000



P | Cabling

Data sheet

Page 3/5

OpDAT REGpro front cover 12xST SM+MM

P/N

15024A0112-E

EAN 4250184130369

2024/10/15

Version: AB

Technical Data

Materials and material properties

Material - Mounting plate	steel
Material - Mounting plate finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
Halogen free	yes
RoHS	compliant

Classifications

ETIM 7.0	EC001130
ETIM 8.0	EC001130
ETIM 9.0	EC001130

Packing details

Type of packaging	1 pc(s) / plastic bag
Packaging unit - Weight (gram)	148 g
Packaging unit - Weight (pound)	0.33 lb
Packaging dimension	160 mm x 100 mm x 380 mm
Packaging dimension	6.299 in. x 3.937 in. x 14.961 in.

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

P | Cabling

Data sheet

Page 4/5

OpDAT REGpro front cover 12xST SM+MM

P/N

15024A0112-E

EAN 4250184130369

2024/10/15

Version: AB

Accessories from

P/N	Designation
15024A10-24-E	OpDAT REGpro24 housing without splice tray
15024A10-E	OpDAT REGpro housing without splice tray
15024A10S-E	OpDAT REGpro housing with splice tray and crimp splice holder
15024B10-E	OpDAT REG Splice Distributor for pre-terminated cables
15024B10S-E	OpDAT REG Splice Distributor for crimp splice holder
15024B10S-S	OpDAT REG Splice Distributor for shrink splice holder



P | Cabling

Data sheet

Page 5/5

OpDAT REGpro front cover 12xST SM+MM

P/N

15024A0112-E

EAN 4250184130369

2024/10/15

Version: AB

Illustrations

Dimensional drawing

