


Data sheet

OpDAT REGpro front cover 6xE2000-D MM

Illustrations



Dimensional drawing

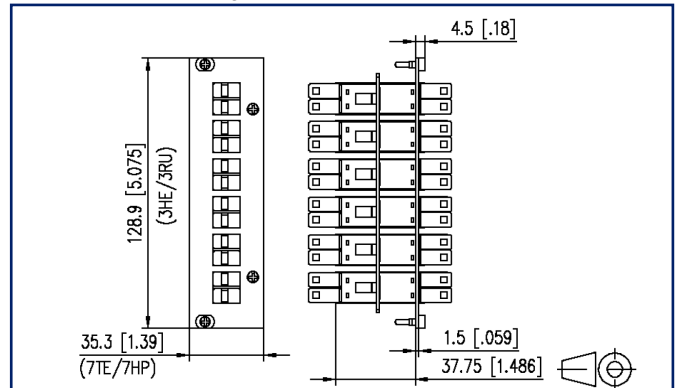

See enlarged drawings at the end of document

Product specification

- front plate 3RU/HPE with 6 E2000-D adapters
- slotted ceramics sleeve for single mode and multi mode applications
- suitable for mounting in OpDAT REG pro and OpDAT REGpro24
- gray, powder-coated steel sheet
- variants: equipped with 6xE2000-D, each in blue (OS2), beige (OS2) or E2000-D APC green (OS2)

Technical Data

General Data

| | |
|---|--|
| Fields of application | structured building cabling office areas data center |
| Mechanical measurement according to MICE | M1 |
| Ingress measurement according to MICE | I1 |
| Climatic measurement according to MICE | C1 |
| Electromagnetic measurement according to MICE | E3 |
| Design | front plate |
| Mounting style | 3RU/7HP |
| Transmission technology | Fiber optic |
| Color | beige |
| Dimensions | |
| Dimension (L x W x H) | 43.75 mm x 128.9 mm x 35.3 mm |
| Dimension (L x W x H) | 1.722 in. x 5.075 in. x 1.39 in. |
| Height unit | 3RU |
| Horizontal pitch | 7HP |
| Mode type of the fiber | Multimode |

Connections/interfaces

| | |
|--|-------------------|
| Connector technology interface 1 | E2000 DC Couplers |
| Connector technology interface 2 | E2000 DC Couplers |
| Number of ports interface 1 | 6 |
| Number of ports interface 2 | 6 |
| Number of equipped ports interface 1 | 6 |
| Number of ports interface 2 equipped | 6 |
| Number of ports with dust protection interface 1 | 6 |
| Number of ports with dust protection interface 2 | 6 |

Mechanical data

| | |
|--------------------------------|-----------|
| Cut-out | E2000 DC |
| Life - Number of mating cycles | min. 1000 |

P | Cabling

Data sheet

Page 3/5

OpDAT REGpro front cover 6xE2000-D MM

P/N

15024A5A06-E

EAN 4250184141709

2024/10/15

Version: AA

Technical Data

Materials and material properties

| | |
|----------------------------------|------------------|
| Material - Mounting plate | steel |
| Material - Mounting plate finish | powder-coated |
| Material - Sleeve | ceramic, slotted |
| Material - Coupler housing | Plastics |
| Halogen free | yes |
| RoHS | compliant |

Classifications

| | |
|----------|----------|
| ETIM 7.0 | EC001130 |
| ETIM 8.0 | EC001130 |
| ETIM 9.0 | EC001130 |

Packing details

| | |
|---------------------------------|-----------------------------------|
| Type of packaging | 1 pc(s) / box |
| Packaging unit - Weight (gram) | 274 g |
| Packaging unit - Weight (pound) | 0.6 lb |
| Packaging dimension | 145 mm x 182 mm x 40 mm |
| Packaging dimension | 5.709 in. x 7.165 in. x 1.575 in. |

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



P | Cabling

Data sheet

Page 4/5

OpDAT REGpro front cover 6xE2000-D MM

P/N

15024A5A06-E

EAN 4250184141709

2024/10/15

Version: AA

Accessories from

| P/N | Designation |
|---------------|---|
| 15024A10-24-E | OpDAT REGpro24 housing without splice tray |
| 15024A10-E | OpDAT REGpro housing without splice tray |
| 15024A10S-E | OpDAT REGpro housing with splice tray and crimp splice holder |
| 15024B10-E | OpDAT REG Splice Distributor for pre-terminated cables |
| 15024B10S-E | OpDAT REG Splice Distributor for crimp splice holder |
| 15024B10S-S | OpDAT REG Splice Distributor for shrink splice holder |



P | Cabling

Data sheet

Page 5/5

OpDAT REGpro front cover 6xE2000-D MM

P/N

15024A5A06-E

EAN 4250184141709

2024/10/15

Version: AA

Illustrations

Dimensional drawing

